


POTENZA POWER <b>400 W</b>	TENSIONE VOLTAGE <b>31 V (AC)</b>	CORRENTE CURRENT <b>16 A</b>	RPM <b>2750</b>	SERVIZIO SERVICE S2 = <b>60'</b>	SERVIZIO SERVICE S3 = <b>70 %</b>	CLASSE ISOL. <b>H</b>	<b>SENZA</b> VENTILAZIONE	ECCITAZIONE <b>AC (3M) 100hz</b>	PESO WEIGHT <b>Kg 11</b>
----------------------------------	---	------------------------------------	--------------------	--	---	-----------------------------	------------------------------	-------------------------------------	--------------------------------

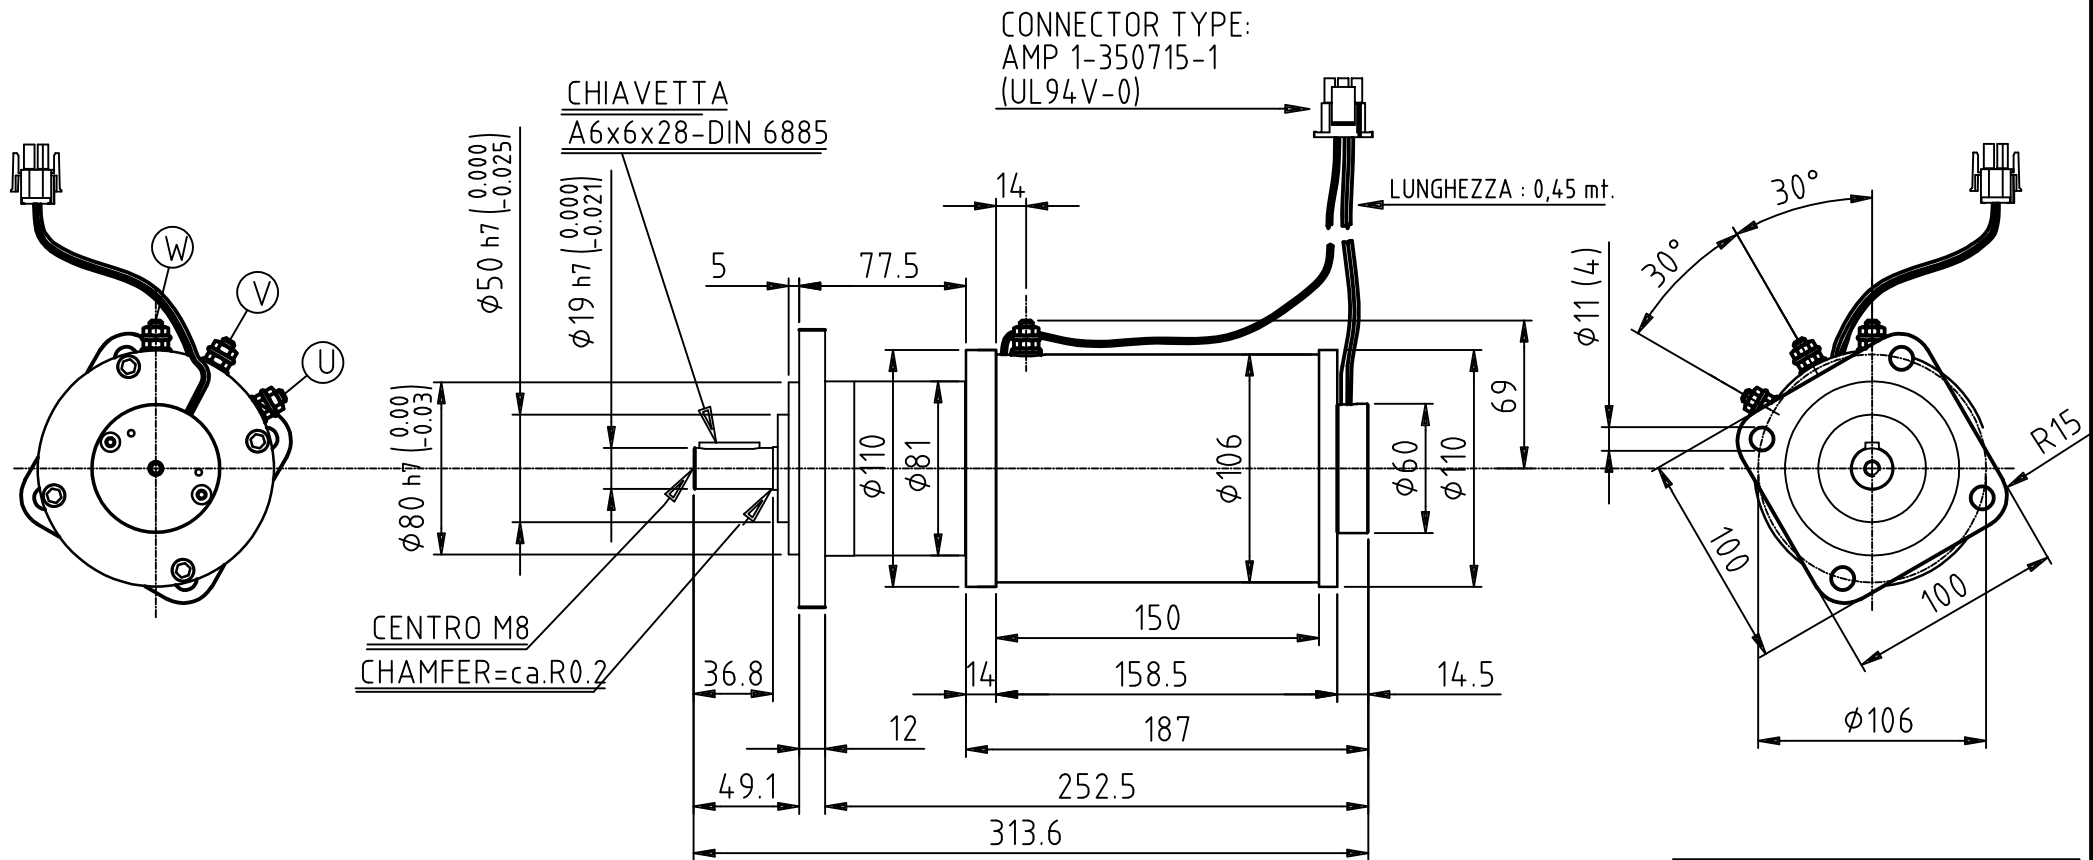

- 1. Thermal sensor wire : UL1015 AWG 18
- 2. Encoder wire : UL2464 AWG 22

INCREMENTAL ENCODER		
N° PULSE REVOLUTION:		4
N° PIN:	DESCRIPTION:	COLOUR:
1	+VCC	YELLOW
2	GND	BROWN
3	SIGNAL A	WHITE
4	SIGNAL B	GREEN
5	SENSOR KTY 84-130	BLACK
6	SENSOR KTY 84-130	RED

Cod.:G104737A

UL CODE: B-90DD301A073A00

Firma PROG. : PO M.

