


POTENZA POWER 2000 W	TENSIONE VOLTAGE 24 V	CORRENTE CURRENT 110	RPM 2000	SERVIZIO SERVICE S2 = 40'	SERVIZIO SERVICE S3 = 50 %	CLASSE ISOL. H	VENTILAZIONE INTERNA	ECCITAZIONE AC (70Hz)	PESO WEIGHT Kg --
-----------------------------------	------------------------------------	-----------------------------------	--------------------	--	---	-----------------------------	--------------------------------	---------------------------------	--------------------------------


SUPERSEAL-6vie(ENCODER)

SUPERSEAL-2vie(Sonda termica 160°)

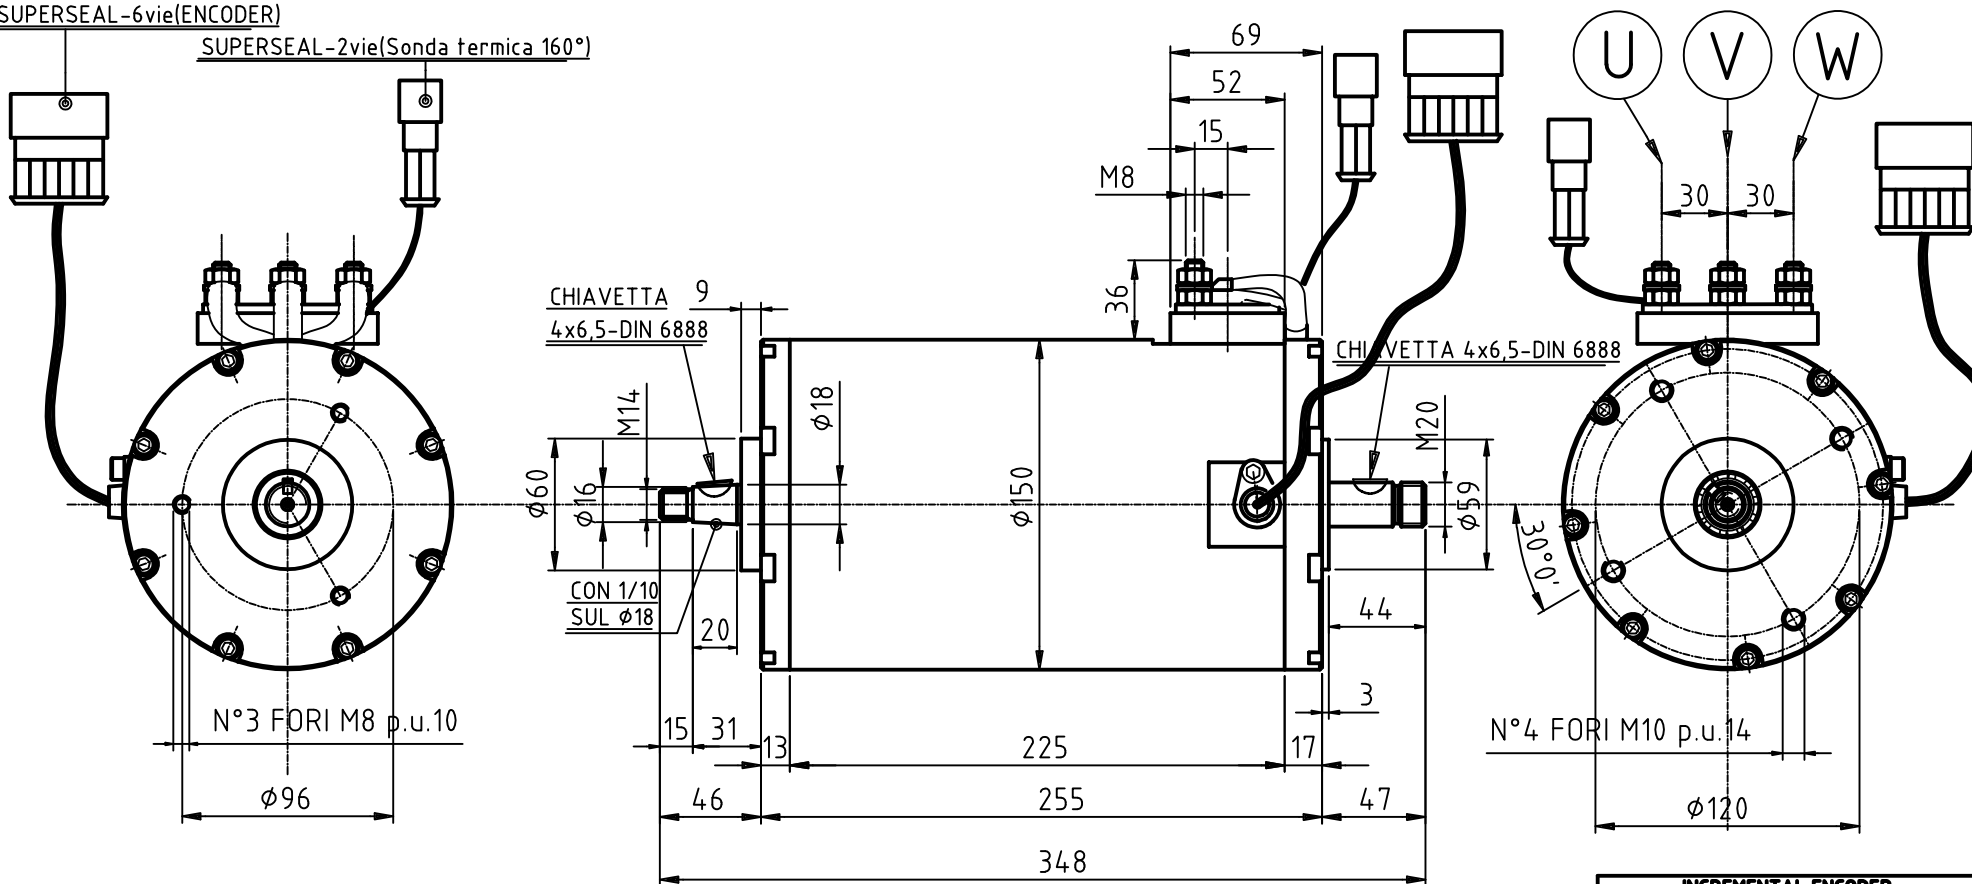

Cod.:G1205500

Firma PROG. : Po M.

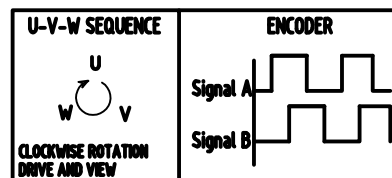

INCREMENTAL ENCODER		
OUTPUT FORM:	OPEN COLLECTOR	
POWER SUPPLY:	+5 / +24 VDC	
OUTPUT CURRENT	20 mA max.	
N° PULSE REVOLUTION:	48	
N°PIN:	DESCRIPTION:	COLOUR:
1	+VCC	RED
2	GND	BLACK
3	SIGNAL A	WHITE(Green)
4	SIGNAL B	BLUE
5/6	//	

G1205500