


| | | | | | | | | | |
|----------------------------|-----------------------------|-----------------------------|-------------|---------------------------------|----------------------------------|----------------------|-------------------------|------------------------------|-------------------------|
| POTENZA POWER 3500 W | TENSIONE VOLTAGE 80 V | CORRENTE CURRENT 55 A | RPM 2000 | SERVIZIO SERVICE S2 = 60' | SERVIZIO SERVICE S3 = 70 % | CLASSE ISOL. F | VENTILAZIONE ESTERNA | ECCITAZIONE FREQ. (70 Hz) | PESO WEIGHT Kg 43 |
|----------------------------|-----------------------------|-----------------------------|-------------|---------------------------------|----------------------------------|----------------------|-------------------------|------------------------------|-------------------------|

SUPERSEAL 6 VIE (Encoder
+ Sonda NC 160)

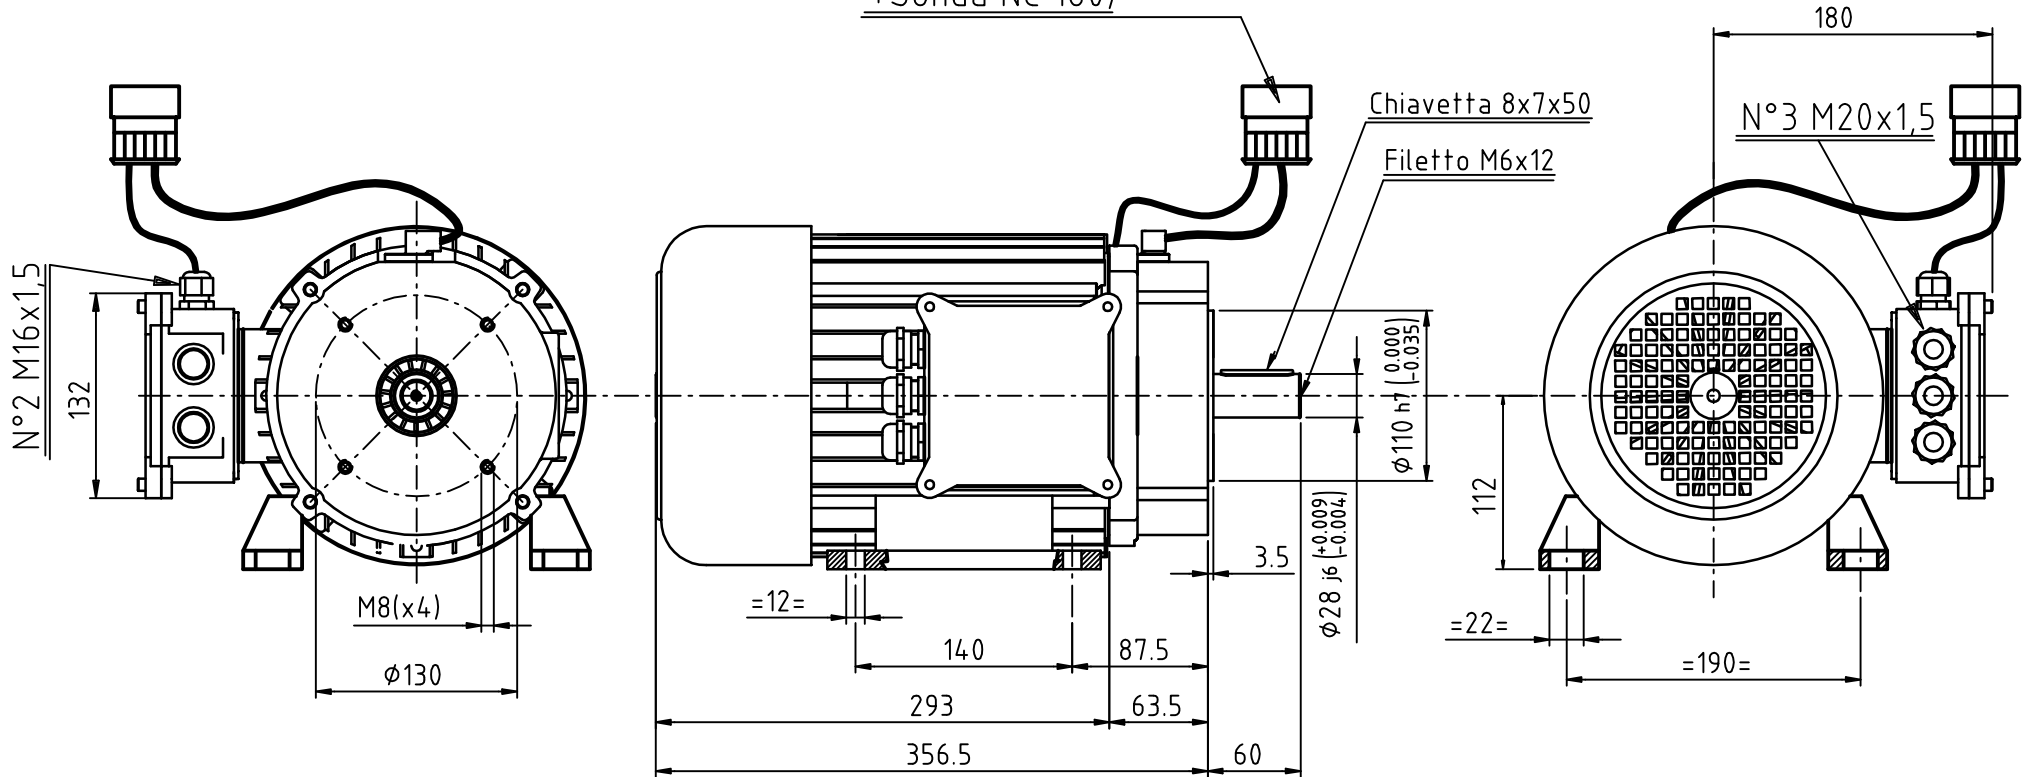

Cod.: G1353406

Firma PROG. : Po M.

| INCREMENTAL ENCODER | | |
|----------------------|----------------|--------------|
| OUTPUT FORM: | OPEN COLLECTOR | |
| POWER SUPPLY: | +5 / +24 VDC | |
| OUTPUT CURRENT | 20 mA max. | |
| N° PULSE REVOLUTION: | 64 | |
| N°PIN: | DESCRIPTION: | COLOUR: |
| 1 | +VCC | RED |
| 2 | GND | BLACK |
| 3 | SIGNAL A | WHITE(Green) |
| 4 | SIGNAL B | BLUE |
| 5/6 | 160° NC | |