


POTENZA POWER 5000	TENSIONE VOLTAGE 48 V	CORRENTE CURRENT 115 A	RPM 2500	SERVIZIO SERVICE S2 = 60'	SERVIZIO SERVICE S3 = 70 %	CLASSE ISOL. H	SENZA VENTILAZIONE	ECCITAZIONE FREQ. (85 Hz)	PESO WEIGHT Kg --
--------------------------	-----------------------------	------------------------------	-------------	---------------------------------	----------------------------------	----------------------	-----------------------	------------------------------	-------------------------

SUPERSEAL-6vie con ENCODER
e sonda KTY 84-130

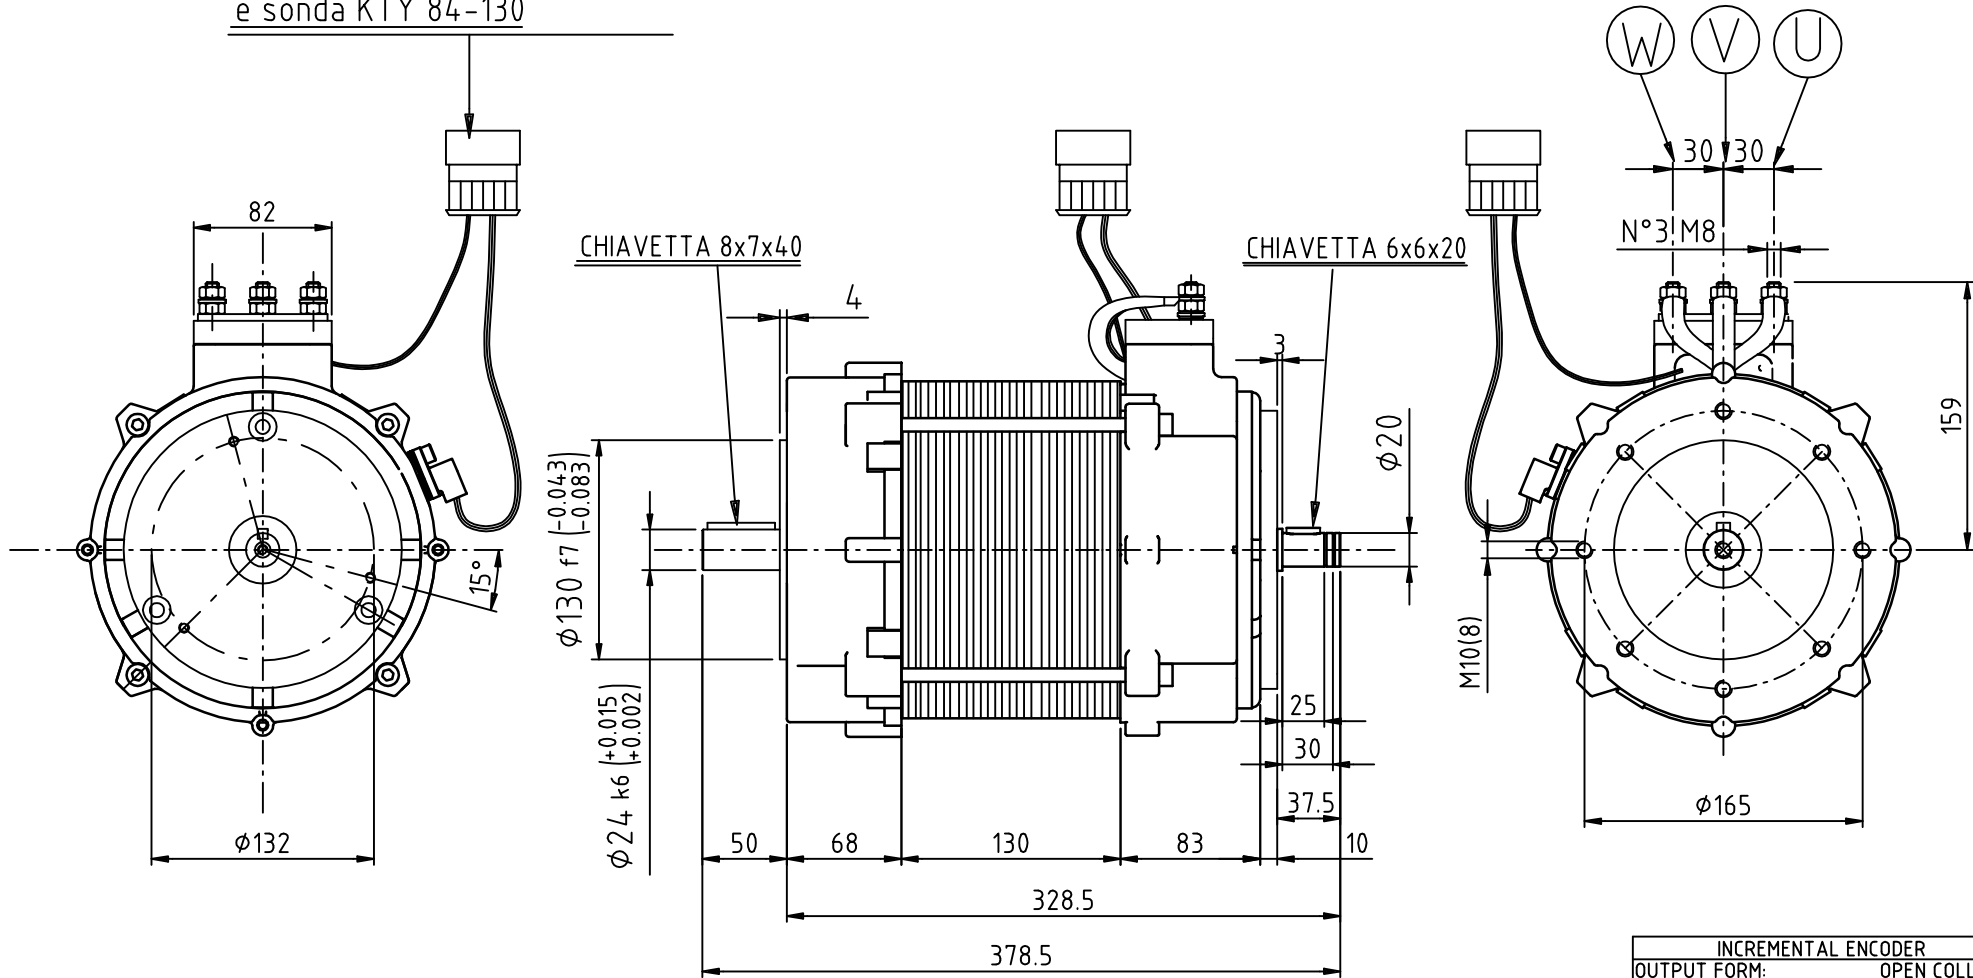

Cod.: G1509600

Firma PROG. : Po M.

INCREMENTAL ENCODER		
OUTPUT FORM:	OPEN COLLECTOR	
POWER SUPPLY:	+5 / +24 VDC	
OUTPUT CURRENT	20 mA max.	
N° PULSE REVOLUTION:	64	
N° PIN:	DESCRIPTION:	COLOUR:
1	+VCC	RED
2	GND	BLACK
3	SIGNAL A	WHITE(Green)
4	SIGNAL B	BLUE
5/6	KTY 84-130	

