
**BEST MOTOR**Tel. 059 - 858059  
fax. 059 - 850410

MOTORE-TRAZIONE AC - IP54



(REV. 0 DEL 20/10/2017)



POTENZA POWER 8 kW	TENSIONE VOLTAGE 48VDC-32VAC	CORRENTE CURRENT 200 A	RPM 3500	SERVIZIO SERVICE S2 = 40'	SERVIZIO SERVICE S3 = 50 %	CLASSE ISOL. F	INDEX COOLING IC 410	ECCITAZIONE FREQ. (118 Hz)	PESO WEIGHT Kg 33 c.a
--------------------------	------------------------------------	------------------------------	-------------	---------------------------------	----------------------------------	----------------------	-------------------------	-------------------------------	-----------------------------

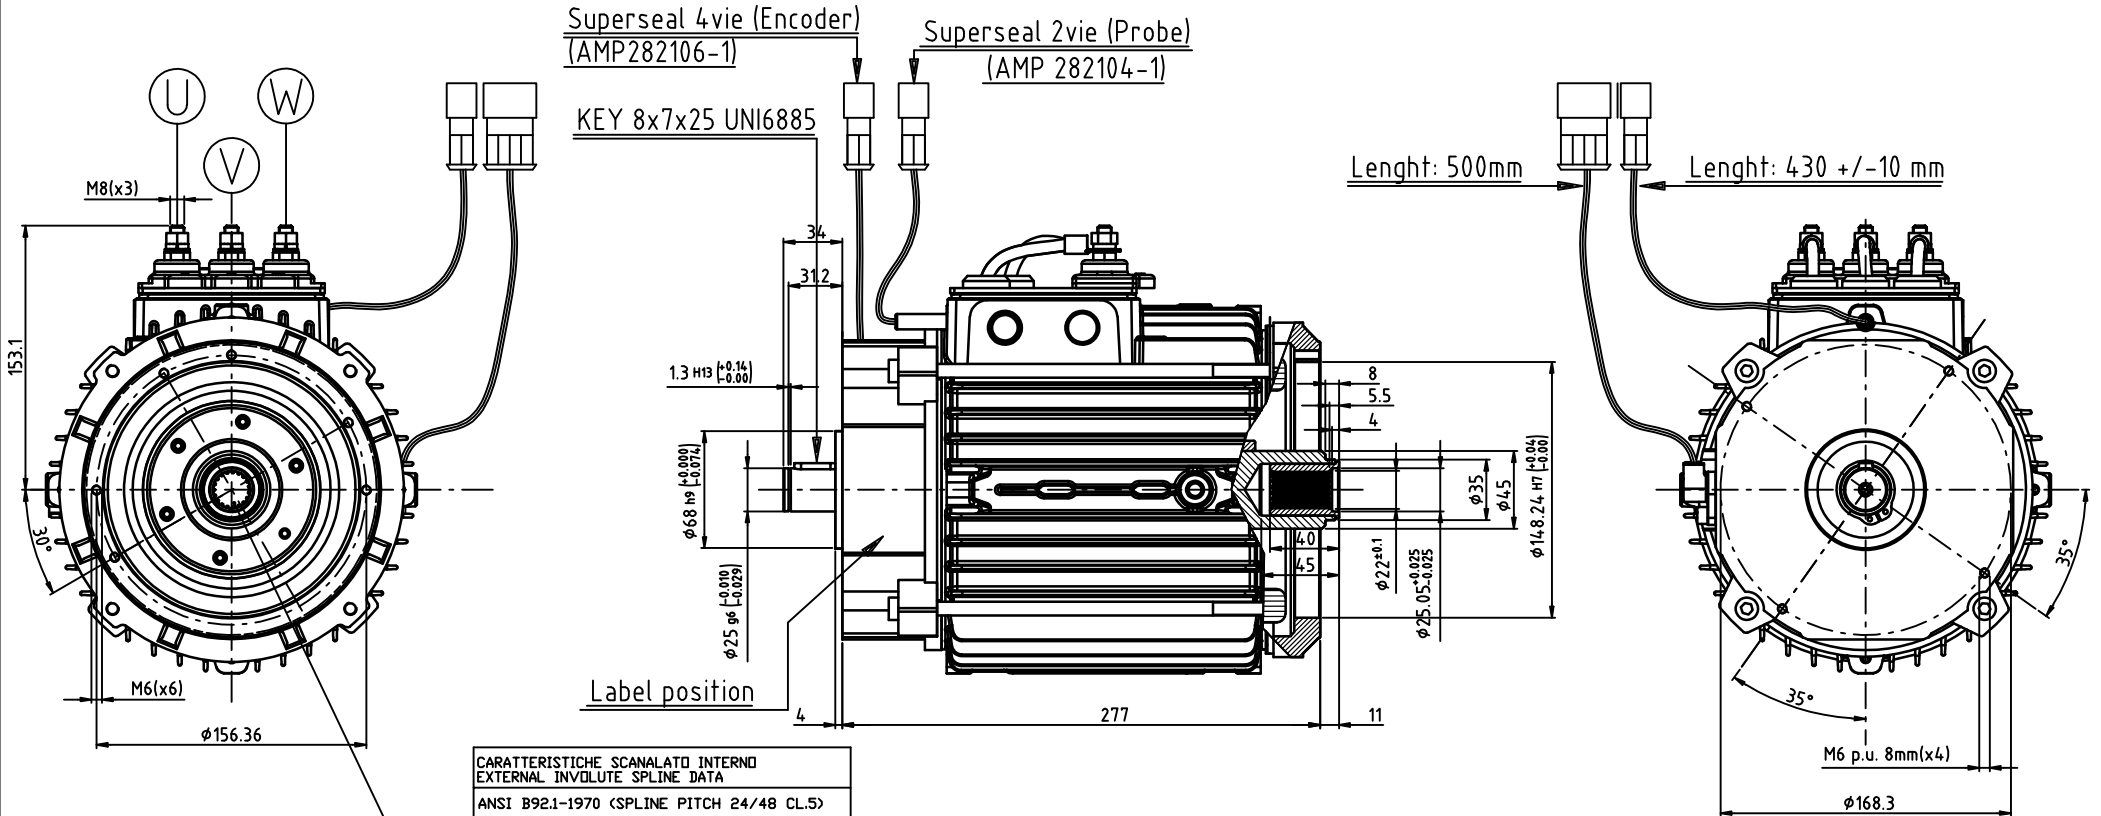

CARATTERISTICHE SCANALATO INTERNO EXTERNAL INVOLUTE SPLINE DATA	
ANSI B92.1-1970 (SPLINE PITCH 24/48 CL.5)	
N° DENTI NUMBER OF TEETH	Z 19
MODULO MODULE	Mn 1.0583/0.5292
DIAMETRO ESTERNO MAJOR DIAMETER	De 21.59 <sup>+0.23</sup> <sub>0</sub>
DIAMETRO INTERNO MINOR DIAMETER	Di 19.48 <sup>+0.127</sup> <sub>0</sub>
DIAMETRO PRIMITIVO PITCH DIAMETER	Dp 20.1083
DIAMETRO DI BASE BASE DIAMETER	Db 14.2187
DIAMETRO DI FORMA FORM DIAMETER	d <sub>cf</sub> T.I.F. 21.2065
ANGOLO DI PRESSIONE PRESSURE ANGLE	45°
MEAS OVER PINS	17.05
MEAS PIN DIA	2.032



SUPERSEAL SONDA	
N°PIN:	DESCRIPTION:
1	POSITIVO (RED)
2	NEGATIVO (BLACK)

INCREMENTAL ENCODER		
OUTPUT FORM:	OPEN COLLECTOR	
POWER SUPPLY:	+5 / +24 VDC	
OUTPUT CURRENT	20 mA max.	
N° PULSE REVOLUTION:	64	
N°PIN:	DESCRIPTION:	COLOUR:
1	+VCC	RED
2	SIGNAL B	BLUE
3	SIGNAL A	WHITE(Green)
4	GND	BLACK

G1804900

Firma PROG. : Po M.