


POTENZA POWER 2000 W	TENSIONE VOLTAGE 48 V	CORRENTE CURRENT 50 A	RPM 2000	SERVIZIO SERVICE S2 = 60'	SERVIZIO SERVICE S3 = 70 %	CLASSE ISOL. H	VENTILAZIONE INTERNA	ECCITAZIONE AC 70Hz (3M)	PESO WEIGHT Kg --
----------------------------	-----------------------------	-----------------------------	-------------	---------------------------------	----------------------------------	----------------------	-------------------------	-----------------------------	-------------------------

Sonda resistenza
variabile KTY

SUPERSEAL-6vie(ENCODER)

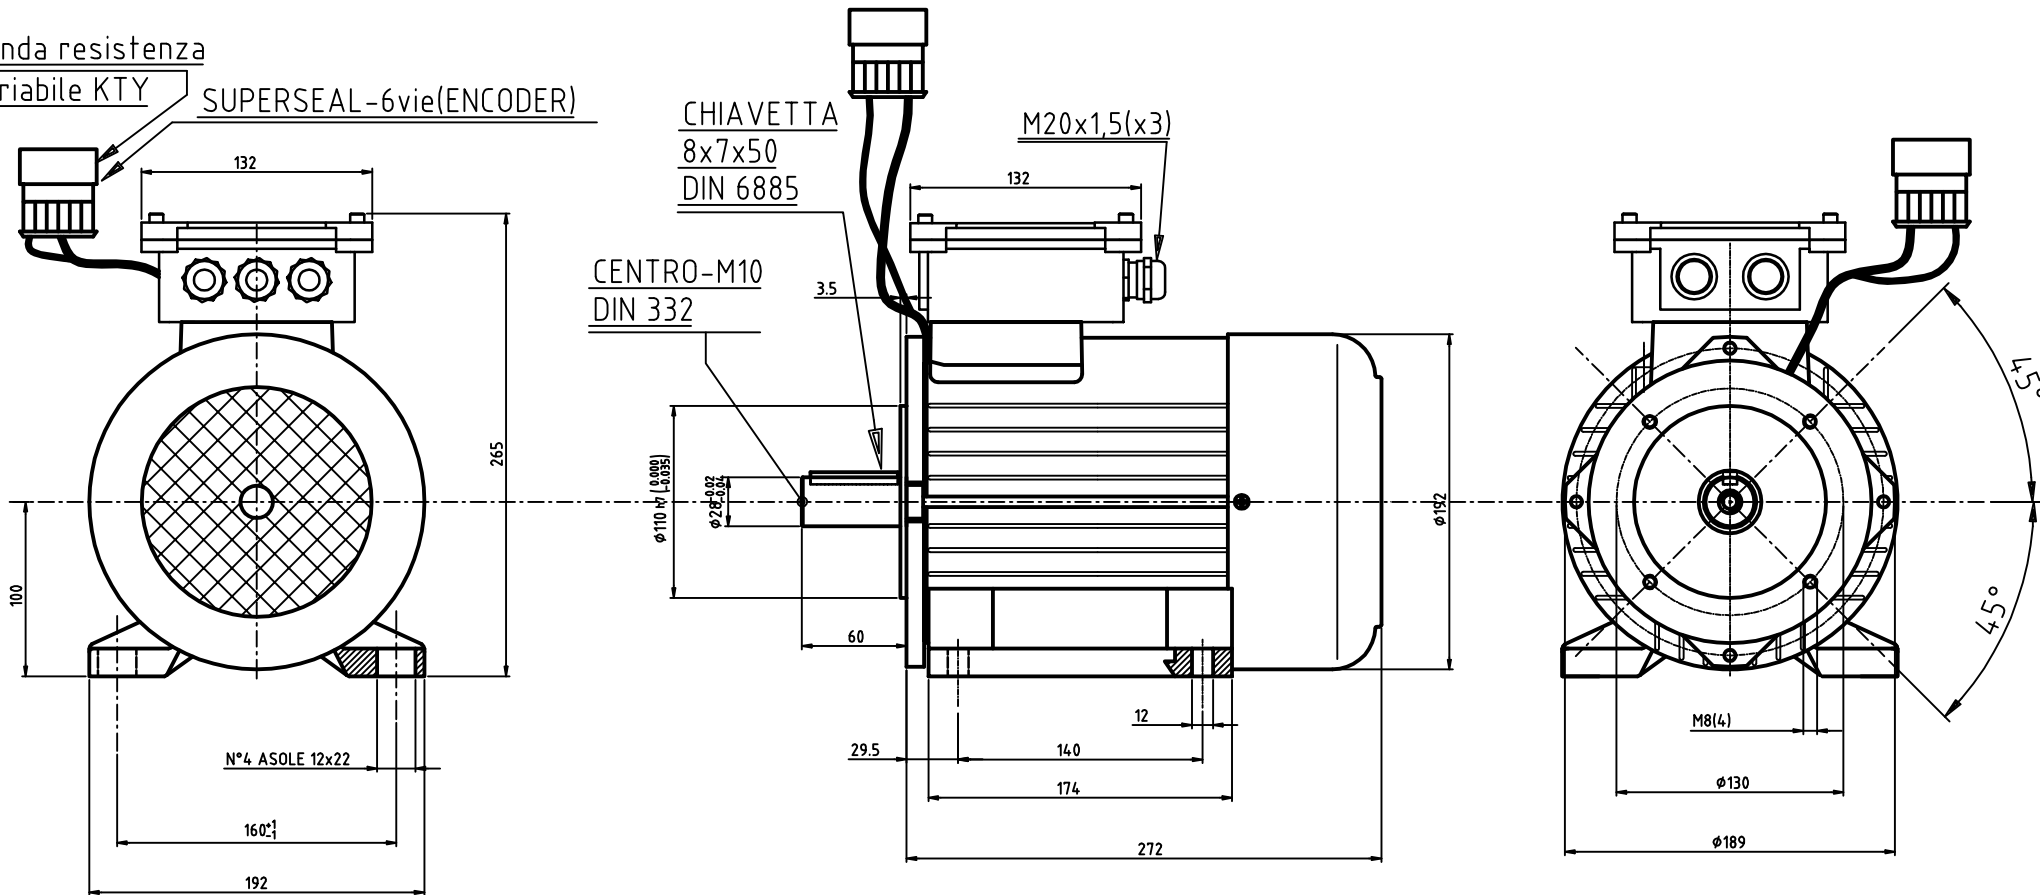

INCREMENTAL ENCODER		
OUTPUT FORM:	OPEN COLLECTOR	
POWER SUPPLY:	+5 V +24 VDC	
OUTPUT CURRENT	20 mA max.	
N° PULSE REVOLUTION:	64	
N°PIN:	DESCRIPTION:	COLOUR:
1	+VCC	RED
2	GND	BLACK
3	SIGNAL A	WHITE(Green)
4	SIGNAL B	BLUE
5/6	NOT USED	/

X2459201