


TRACTION MOTOR IP20 WITH GEARBOX IMS SP 81
2 STAGE RATIO 1:35 (INDEX 2 - 01/09/2014)

POTENZA POWER 400 W	TENSIONE VOLTAGE 24 V	CORRENTE CURRENT 25 A	RPM 3000	SERVIZIO SERVICE S2 = 60'	SERVIZIO SERVICE S3 = 70 %	CLASSE ISOL. F	SENZA VENTILAZIONE	ECCITAZIONE AC (3M) 60hz	PESO WEIGHT Kg 7,5
----------------------------------	------------------------------------	------------------------------------	--------------------	--	---	-----------------------------	-----------------------	-----------------------------	---------------------------------

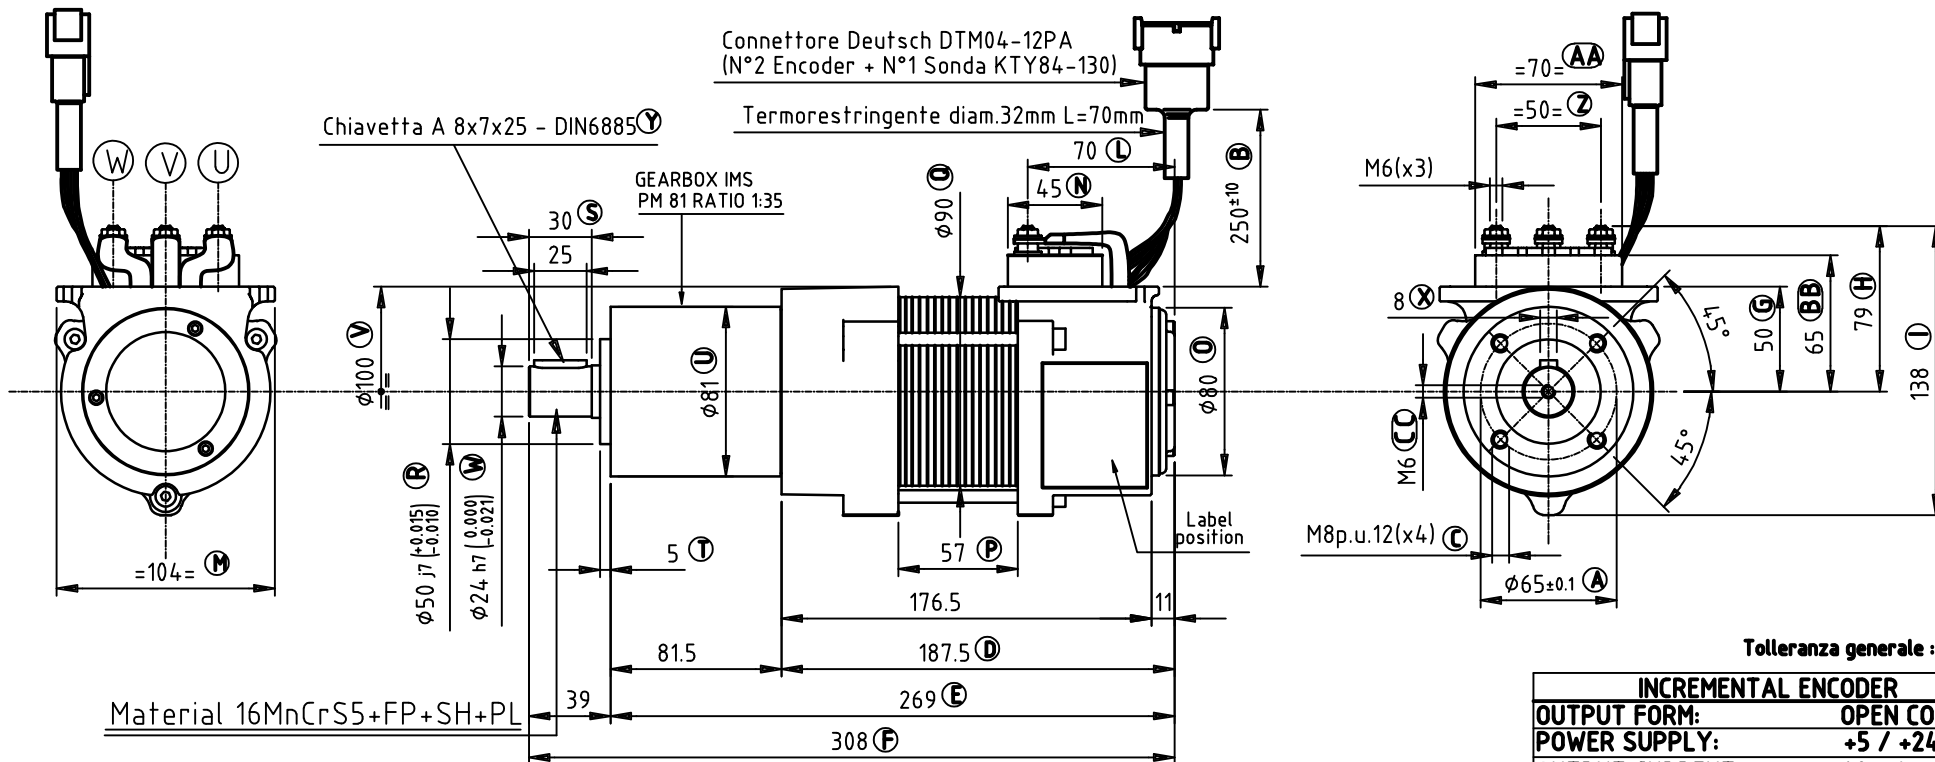

INCREMENTAL ENCODER		
OUTPUT FORM:		OPEN COLLECTOR
POWER SUPPLY:		+5 / +24 VDC
OUTPUT CURRENT		20 mA max.
N° PULSE REVOLUTION:		32(Enc.1)-4(Enc.2)
N°PIN:	DESCRIPTION:	COLOUR:
1	+VCC encoder 1	RED
2	Signal A encoder 1	WHITE
3	Signal B encoder 1	BLUE
4	GND encoder 1	BLACK
5	Empty / Vuoto	Plug / Tappo
6	Thermal sensor +	RED
7	Thermal sensor -	BLACK
8	Empty / Vuoto	Plug / Tappo
9	GND encoder 2	BROWN
10	Signal B encoder 2	GREEN
11	Signal A encoder 2	WHITE
12	+VCC encoder 2	YELLOW

UL Code: B-90BB102B031C00

Best part: B-G104657B

Firma PROG. : PO M.

